## FTF4869

## Monolithic Crystal Filter



Part number: 4869 | Revision: W1 | Date: 25 January 2023

### 1.0 Main parameters

I	N°	Characteristics	Symbol	Value	Unit	Note
	1.1	Nominal centre frequency	fc	21.4	MHz	fundamental mode
	1.3	Number of poles		4		Single SMD 7x5 package



#### 2.0 Insection loss

Ν	°	Characteristics	Symbol	Min.	Nom.	Max.	Unit	Note
2	.1	Insertion Loss (IL) at fc	IL			3	dB	Measured on smallest attenuation

### 3.0 Passband

N°	Characteristics	Symbol	Nom.	Unit	-Δ F <sub>min</sub>	+∆ F <sub>max</sub>	Unit	Note
3.1	Bandwidth between 3dB frequencies		3	dB	-7.5	+7.5	kHz	Referred to f <sub>c</sub>

### 4.0 Ripple over

N°	Characteristics	Symbol	Nom.	Unit	-∆ F <sub>min</sub>	+∆ F <sub>max</sub>	Unit	Note
4.1	Ripple over (Peak to Valley)		≤1.0	dB	-7.5	+7.5	kHz	Referred to fc

## 5.0 Stopband


N°	Characteristics	Symbol	Nom.	Unit	-Δ F <sub>min</sub>	+∆ F <sub>max</sub>	Unit	Note
5.1	StopBand		≥35	dB	-25	+25	kHz	
5.2	Alternate attenuation		≥80	dB	-910	-900	kHz	

## 6.0 Matching

N°	Characteristics	Symbol	Resistance	Unit	Capacitance	Unit	Note
6.1	Input and output		1900	Ω	1.6	pF	
6.2	Coupling capacitance				7.0	pF	

### 7.0 Temperature range

N°	Characteristics	Symbol	Min.	Nom.	Max.	Unit	Note
7.1	Operating	OTR	-20		70	°C	
7.2	Storage	STR	-40		85	°C	



## FTF4869


# Monolithic Crystal Filter




Part number: 4869 | Revision: W1 | Date: 25 January 2023

### 8.0 Package, marking and pin connections


		•	
N°	Characteristics	Specifications	Model outline drawing
8.1	Package type	SMD, 7.0 x 5.0 mm	
8.2	Marking	Line 1: FTF4869 Line 2: 106056 Line 3: YWW (Date code)	
8.3	Pin connections	Pin 1, 4: GND Pin 2, 5*: Coupling capacitance Pin 3: IN / OUT Pin 6: OUT / IN	2 × 12-(1
	* Pins 2 and 5 are and must be conn		

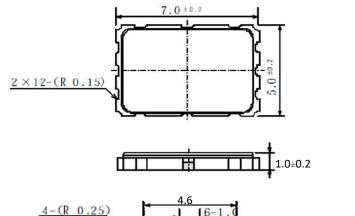

Unit: mm

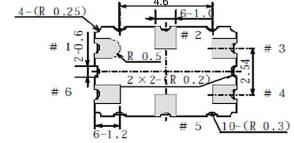

### 9.0 Test circuit

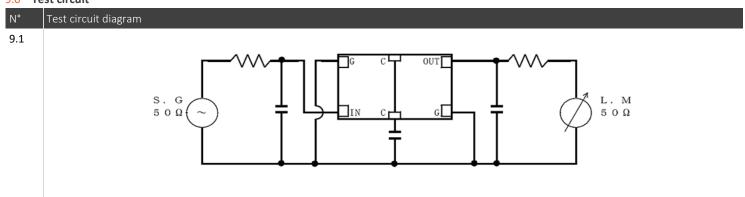

### 10.0 Specification History

Revision	Change notes	Date
W0	Preliminary Datasheet creation	Feb, 3 <sup>rd</sup> 2016
W1	Re-branding Rakon to RakonXpress	Jan, 25 <sup>th</sup> 2023